

BIT MAXX™

Exclusive *NEW* Technology

1. Double the distance of standard camera link cables
2. Fraction of the cost of repeaters
3. High flex cable construction
4. Compact, low profile solution
5. PoCL compatible

Part Numbers

SMVB-EP-B-(XX)-(Y)

- 1 Bitmaxx EP base cable, MDR to MDR
- 1 power supply

SMVB-EP-F-(XX)-(Y)

- 1 Bitmaxx EP base cable, MDR to MDR
- 1 Bitmaxx EP full cable, MDR to MDR
- 1 Power supply (supplies power to both cables)

SMVB-EPM-B-(XX)-(Y)

- 1 Bitmaxx EP base cable, MDR to HDR
- 1 Power supply


SMVB-EPM-F-(XX)-(Y)

- 1 Bitmaxx EP base cable, MDR to HDR
- 1 Bitmaxx EP full cable, MDR to HDR
- 1 Power supply (supplies power to both cables)

Custom configurations available upon request.

Per Camera Link standards:

- All pairs are individually shielded with aluminum foil.
- Pair shields are wrapped aluminum out and are in contact with four internal drains.
- Outer braid and foil (chassis ground) are isolated from inner drains (digital ground).

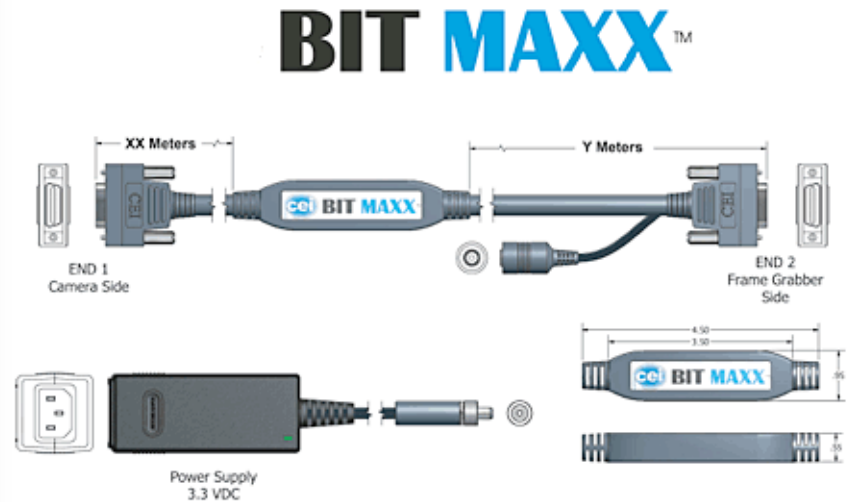

Performance Chart **EQCL FULL / BASE**

