


RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST EDITION	2009/02/11	

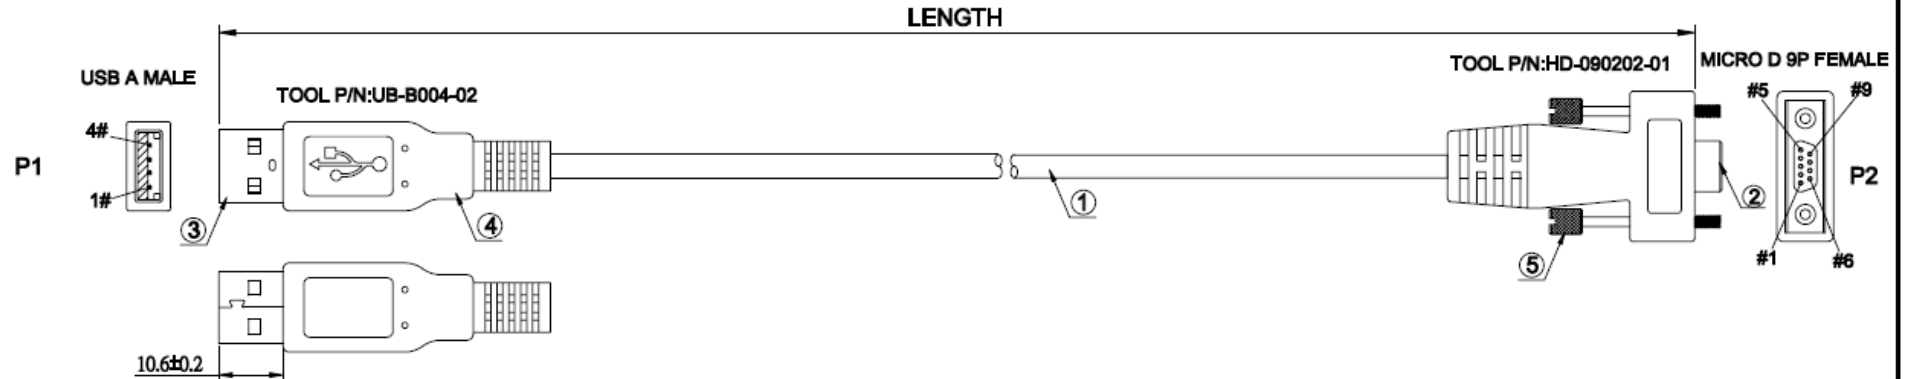


NOTES:


1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
 - (a). 100% OPEN, SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE: 20 Mohm MIN.
DC 300V 0.01sec; 0.03sec.
 - (c). CONTACT RESISTANCE: 3 ohm MAX.

PART NO.	LENGTH
CY-S-0466-03M	3000±50
CY-S-0466-05M	5000±50


SCREW

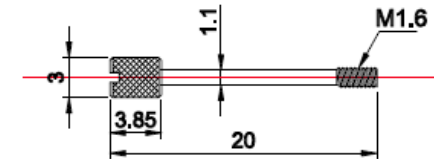

PIN ASSIGNMENT

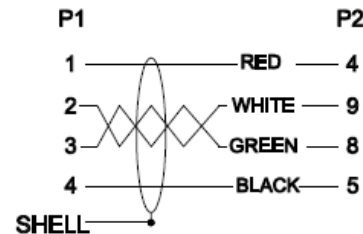

ITEM	QTY	PART NUMBER	DESCRIPTION
5	2	C0347	SCREW:M1.6 3.0*20MM,NICKEL PLATED.
4		G0001	ALL CONNECTOR OVERMOLD BLACK PVC.
3	1	A0114	USB A TYPE ,MALE ,GOLD PLATED 30°.SOLDER TYPE.
2	1	A0550	MICRO D 9P FEMALE, SOLDER TYPE,BLACK INSULATOR,WITH M1.6 AND M3 SCREW.
1	1	E0849 H7304R	28AWG*1P+26AWG*2C-AM-SP-FPP. OD:4.5MM UL20276 BLACK PVC JACKET.

	REV.	DWG NO: CY-S-0466		
	A	CUSTOMER:		
DRAW,BY:		CUSTOMER P/N:CY-S-0466-XXM		
CHECK,BY:	SCALE	UNIT	SHEET	
APP,BY:	FREE	mm	1/1	